

BARRICADE

Technical Data Sheet

TERRAZZO, MARBLE, GRANITE AND MASONRY SEALER

DESCRIPTION:

A urethane/acrylic sealer uniquely formulated to promote adhesion to terrazzo, marble, granite and all types of non-resilient stone floors.

USES:

As a sealer/finish on terrazzo, marble and all other stone surfaces. BARRICADE can be maintained with conventional low or high speed equipment.

LIQUID PROPERTIES:

CONCENTRATE pH	9.0±0.2
COLOR	Milk White
DENSITY	8.6 #/gal
FLAMMABILITY	Non-Flammable
SHELF LIFE	1 Year 22°C 30 Days 50°C
STABILITY	Passes 3 Freeze- Thaw cycles

FILM PROPERTIES:

CLARITY	Clear
COLOR	Colorless
COLOR STABILITY	Non-yellowing, U.V. tested for 72 hrs.
GLOSS	Two Coats, 60° Photo- volt Glossmeter: Vinyl 90; Black Glass 95
SLIP RESISTANCE	Meets or exceeds ASTM method D 2047-82

COVERAGE:

1,000 - 4,000 Square feet per gallon depending upon porosity of substrate

DIRECTIONS:

- 1 Make sure that the surface is clean and dry. Do not apply over other sealers.
- 2 Apply 2-3 thin coats of Barricade using a cross coat technique.
- 3 Allow 20 - 30 minutes drying time between coats. Local variations in temperature and humidity can affect drying time.


CAUTIONS:

Wear rubber gloves and eye protection when using this product.

KEEP OUT OF THE REACH OF
CHILDREN

EMERGENCY ACTIONS:

If ingested, induce vomiting. Seek medical attention at once!
If eye is contacted, flush with water and seek medical help.
For external skin contact, remove contaminated clothing and wash thoroughly with water.

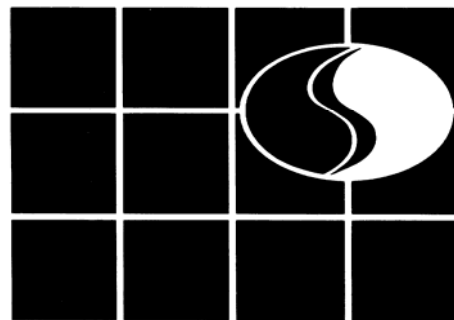

SPECTROWAX CORPORATION

America's choice for all things custodial
70 Hichborn Street/Boston, Massachusetts 02135
Voice (617) 254-2800/ (800) 545-5444 FAX (617) 782-0176