

SEASONS (25%)

Technical Data Sheet

HIGH SPEED FLOOR FINISH

DESCRIPTION:

SEASONS is a high speed floor finish that has been formulated with five different polymers to allow it to respond to all types of high speed burnishing equipment. Simply using a different floor pad will allow the use of battery, electric or propane high speed burnishers. Can be burnished repeatedly without the need for frequent recoats. SEASONS is scuff resistant, black mark resistant, and has very high initial gloss.

USES:

For use on vinyl, vinyl composition, asphalt, rubber terrazzo and all sealed masonry surfaces.

LIQUID PROPERTIES:

SOLIDS	25.0% ± 0.5%
pH	8.6 ± 0.2%
COLOR	Milk White
DENSITY	8.75 #/gal
FLAMMABILITY	Non-Flammable
SHELF LIFE	1 yr @ 22°C, 45 days @ 50°C
STABILITY	Passes 3 Freeze Thaw Cycles per ASTM D3209-82

FILM PROPERTIES:

CLARITY	Clear
COLOR	Colorless
COLOR STABILITY	Non-yellowing, U.V. tested for 72 hours
GLOSS	94 min per ASTM D1455-82
SLIP RESISTANCE	Meets or exceeds ASTM D2047-82

DIRECTIONS:

- 1 Clean or strip area to be coated.
- 2 Rinse floor thoroughly and allow to dry.
- 3 Apply 3-4 medium coats using cross coat technique. Allow to dry for 30 minutes between coats.

MAINTENANCE

- 1 Sweep or dry mop the area to be maintained.
- 2 Mop or Autoscrub floor with HIGHLIGHT or other Spectrowax Maintainer.
- 3 Burnish floor.
- 4 Recoat as necessary.

COVERAGE:

2,000 to 3,000 square feet per gallon.


CAUTIONS:

Contains Diethylene glycol methyl ether CAS#111-77-3
Wear rubber gloves and eye protection when using this product.

KEEP OUT OF THE REACH OF CHILDREN

EMERGENCY ACTIONS:

If ingested, induce vomiting. Seek medical attention at once!
If eye is contacted, flush with water and seek medical help.
For external skin contact, remove contaminated clothing and wash thoroughly with water.

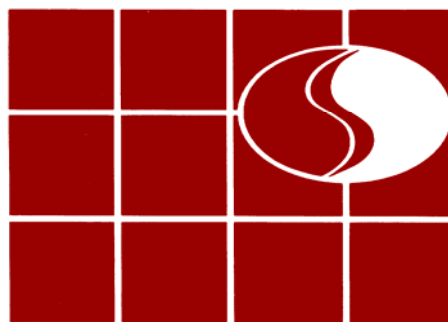

SPECTROWAX CORPORATION

America's choice for all things custodial
70 Hichborn Street/Boston, Massachusetts 02135
Voice (617) 254-2800/ (800) 545-5444 FAX (617) 782-0176